




Technical Data Sheet

PN# PF152-RS/PW

Bremen

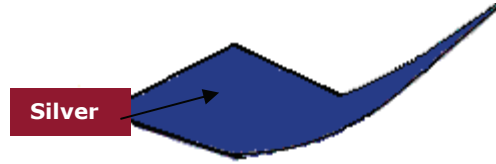


Bremen

Silver Plated Nylon Fabric

PURPOSE:	Conductive fabric for general use
DESCRIPTION:	Silver plated nylon fabric (plain weave or rip stop)
SURFACE RESISTIVITY:	< .3 Ohms/□
SHIELDING EFFECTIVENESS:	Average > 60db from 30Mhz to 3Ghz
ABRASION RESISTANCE:	800,000 Cycles
TEMPERATURE RANGE:	-40°C to 90°C
TOTAL THICKNESS:	0,120 mm (.0045") nominal
ROHS	Compliant

PRODUCT APPLICATIONS:

- Base material for conductive fabric tape
- Base material for EMI/RFI gaskets
- Base material for EMI/RFI garments
- Passive static eliminator for copier, fax & printers
- EMI/RFI cable shielding
- Medical clothes
- Wound dressing

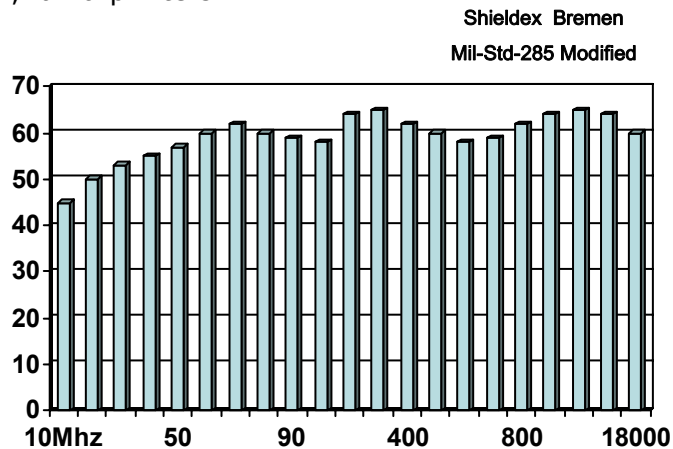

Shieldex Trading US
4502 Route 31 Palmyra NY 14522 USA
Tel: +315-597-1674 / Fax: +1 315-597-6687
shieldex2@rochester.rr.com www.shieldextrading.net


Statex Productions & Vertriebs GmbH
Kleiner Ort 11, 28357 Bremen Germany
Tel: (+49)421-275047/8 Fax: (+49)421-273643
info@statex.de www.statex.de



Technical Data Sheet

PN# PF152-RS/PW

Bremen

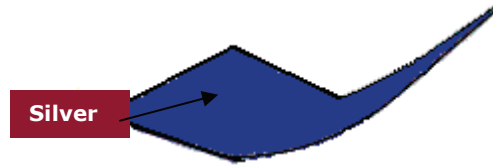

Bremen

Silver Plated Nylon Fabric

NUMBER OF SPLICES:	Maximum 1 per 100m / 350 ft
WIDTH:	130 cm ± 2 cm
ROLL LENGTH:	Average 200m
WEIGHT:	48g /m2 ± 15%

© 2005 Shieldex Trading
Revision Bre01.13.06



Shieldex Trading US
4502 Route 31 Palmyra NY 14522 USA
Tel: +1 315-597-1674/Fax: +1 315-597-6687
shieldex2@rochester.rr.com www.shieldextrading.net

Statex Productions & Vertriebs GmbH
Kleiner Ort 11, 28357 Bremen Germany
Tel: (+49)421-275047/8 Fax: (+49)421-273643
info@statex.de www.statex.de