




# Technical Data Sheet

PN# PF3151RS

## Nanking

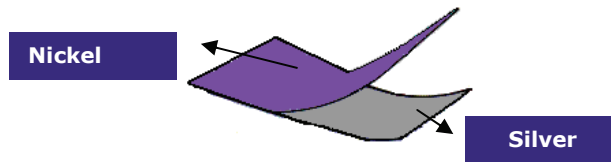

### PF3151RS

**PURPOSE:**

DESCRIPTION:

SURFACE RESISTIVITY:

SHIELDING EFFECTIVENESS:

ABRASION RESISTANCE:

TEMPERATURE RANGE:

TOTAL THICKNESS:

NUMBER OF SPLICES:

TYPE OF SPLICE:

ROLL WIDTHS:

ROLL LENGTH:

**ROHS**

**PRODUCT APPLICATIONS:**

Base material for EMI/RFI garments  
Base material for EMI/RFI cable shielding

### Nickel-Silver Shieldex Fabric

Conductive Fabric for General Use

Nickel-Silver Plated Woven Ripstop Fabric

0.5 Ohms/□ Maximum; Average 0.3 Ohms/□

Average 80 db from 30 Mhz to 1 Ghz

1,000,000 Cycles

-40 °C to 90°C

.003" nominal

1 in 70 yards


Butterfly

52.0" ± 1.0"

Average 900—950'

Compliant

Shieldex Nanking Rip-Stop Fabric  
Mil-Std 285 Modified

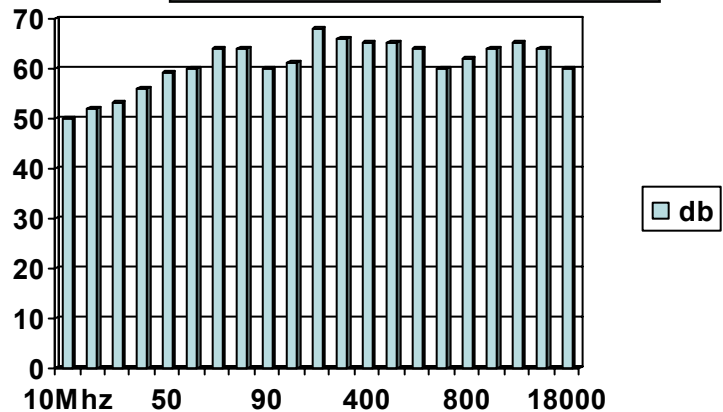

© 2005 Shieldex Trading US  
Revision 01.14.06



Shieldex Trading US  
4502 Route 31 Palmyra NY 14522 USA  
Tel: +1 315-597-1674/Fax: +1 315-597-6687  
shieldex2@rochester.rr.com www.shieldextrading.net

Statex Productions & Vertriebs GmbH  
Kleiner Ort 11, 28357 Bremen Germany  
Tel: (+49)421-275047/8 Fax: (+49)421-273643  
info@statex.de www.statex.de