

## Conductive Yarn



### Conductive Yarn

**PURPOSE:**

Material Resistance:  
Material Resistivity:


**General Properties**

Nominal Denier:  
Nominal Diameter:  
Number of Filaments:  
Twist:  
Twist Direction:  
End Joinings:  
Splice Frequency:  
Yield


### Silver Plated Nylon 66 Yarn + SS 595/1

ESD and resistance heating applications  
<2  $\Omega$ /foot  
< 0.25  $\Omega$ /sq. cm

595  
.800mm  
18 nominal  
air entangled  
none  
note splice only  
4 Max/Package  
112000 yards/lb



Cross section views of nylon fiber showing silver deposits



**Physical Property Specifications**

Denier At 11% MR: Min=590 / Max=599  
Breaking Strength (g.):  
Elongation At Break (%):  
Shrinkage (%) \*\*:  
Tenacity (cN/tex)  
Melting Point (F°)

**Packaging**

Single Case: 25 Packages  
Nominal Case Weight: 26 Lb.  
Standard Pallet: 16 Cases  
Nominal Pallet Weight: 466 Lb.



Shieldex Trading GmbH  
4502 Route 31 Palmyra NY 14522 USA  
Tel: +1 315-597-6687 Fax: +1 315-597-6687  
shieldex@rochester.rr.com shieldextrading.com

Statex Productions & Vertriebs GmbH  
Querlandstraße 6b 28357 Bremen Germany  
Tel: (++49)421-275047/8 Fax: (++49)421-273643  
statex@easy-online.net statex.com





## Conductive Yarn

### Textile Notes

#### Twist

During the spinning process fibers are twisted into yarn. Twisting the fibers holds them together and gives the yarn strength. There are only two directions that yarn can be twisted- clockwise and counter clockwise. Either direction can be used. Counter-clockwise twist is known as "S" twist while clockwise is known as "Z" twists. Single strands of yarn are usually given a Z twist during spinning and plied yarns are usually given an S twist.

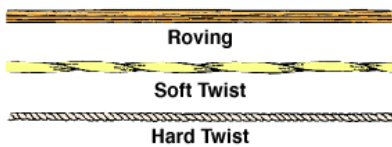

The degree of twist required depends on the fiber and can vary from no twist to high twist. Yarns with no twist are called 'Roving' while high twist yarns are 'Crepe'. The amount of twist in a yarn is measured in Turns Per Inch (TPI). Spun yarns with relatively little twist of 2-12 TPI are referred to as 'Soft Twist'. Yarns with 20-30 TPI

are referred to as 'hard twist.'

#### Packaging

Yarns are bought and sold by weight, not by length. Because of this sizes (or numbers) are used to express a relationship between unit length and weight of yarn.

There are two main numbering systems- direct numbering for filament yarns and indirect numbering for spun yarns. While yarns sizes reflect a relationship between weight and length, this relationship also reflects the diameter or thickness of the yarn, although not as precisely. Basically the relationship to size is expressed in that a lighter weight yarn is finer (smaller) than a heavier weight yarn of the same length. This relationship becomes less precise due to variations in twist and fibers. Therefore sizes express the relationship between weight and length in a yarn and a close, but not precise, relationship to diameter.

#### Direct Numbering

In the direct system as the numerical value of the size goes up, so does the weight per length and the diameter. Direct numbering is expressed in terms of weight in grams over length in meters. The most common direct numbering terms are:

- Denier- Grams/9000 M
- Decitex- Grams/ 10,000 M
- Tex- Grams/1000

©2004 Shieldex Trading US  
Revision 07.25.0411717



Shieldex Trading GmbH

4502 Route 31 Palmyra NY 14522 USA

Tel: +1 315-597-6687 Fax: +1 315-597-6687

shieldex@rochester.rr.com shieldextrading.com



Statex Productions & Vertriebs GmbH

Querlandstraße 6b 28357 Bremen Germany

Tel: (++49)421-275047/8 Fax: (++49)421-273643

statex@easy-online.net statex.com