




Technical Data Sheet

PN# 260151022110

Conductive Sewing Thread Size 40

Purpose: Conductive sewing thread for making conductive paths in garments and textiles, for making ESD products, medical and EMI shielding . Lightweight thread typically used for sewing garments. It is stronger than comparable polyester and cotton threads.

- Description: Conductive Sewing Thread Silver plated Nylon 66 yarn 22 dtex + 3ply of 110 dtex PET total Size 40
- Lineal Resistance: <math><4000K \Omega / 50cm</math>
- Nominal TEX: 360
- Nominal Denier: 350
- Nominal Diameter: 180 microns
- Yield: 27,692.3 M/Kg
-
- Standard Packages: (1) 100g cone

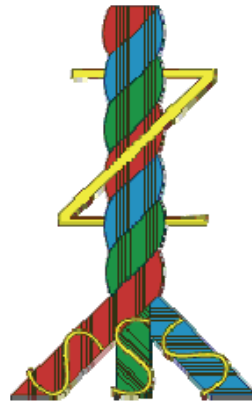

A Woman's Owned Small Business

VTT/Shieldex Trading USA
4502 Rt-31 Palmyra, NY, 14522

Phone: 315-597-1674
Fax: 315-597-6687
Email: whoge@rochester.rr.com
www.shieldextrading.net

Statex Productions & Vertriebs GmbH
Kleiner Ort 11 28357 Bremen Germany
Tel: +49 421 275047/8, Fax: +49 421 273643
info@statex.de


© 2010 VTT
Rev 1.20.09