





# Technical Data Sheet

PN# 600500105

## SHIELDDEX® 2611

- Purpose: RF shielding and Theatrical drapery, medical garments
- Description: High conductive silver plated nylon elastic knit mesh
- Surface Resistance: <math><1\text{ ohms}/\square</math>
- Shielding Effectiveness: 60db @ 30Mhz to 1Ghz average
- Hole size/cm: Length 12 x width 10
- Temperature Range: -30c to +90c
- Total Thickness: 0.23mm average
- Weight: 28g/Msq.
- Roll Lengths: 100 LY average
- Roll Width: 145cm

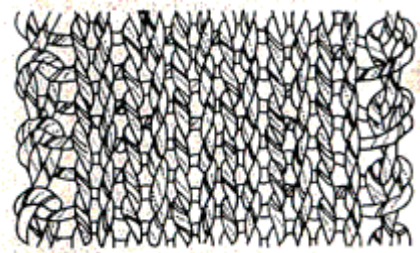


**Accreditations:**  
RoHS: Compliant  
Reach: Compliant  
Acc. ISO 9001:2000

## PRODUCT APPLICATIONS

- ⇒ IR camouflage
- ⇒ Thermal conductive applications
- ⇒ Medical equipment shielding

Shieldex 2611 Mesh Fabric  
Mil-Std 285 Modified

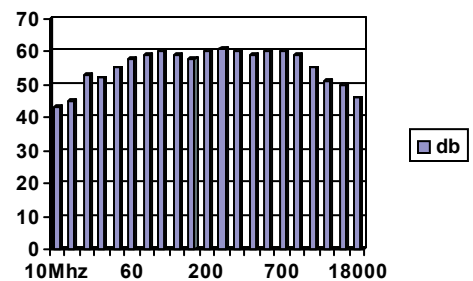

*A Woman's Owned Small Business*

**VTT/Shieldex Trading USA**  
**4502 Rt-31 Palmyra, NY, 14522**

**Phone: 315-597-1674**  
**Fax: 315-597-6687**  
**Email: whoge@rochester.rr.com**  
**Www.shieldextrading.net**

Statex Productions & Vertriebs GmbH  
Kleiner Ort 11 28357 Bremen Germany  
Tel: +49 421 275047/8, Fax: +49 421 273643  
info@statex.de

  
© 2009 VTT  
Rev 2.20.09