




Technical Data Sheet


PN# 1100401100 / previously PF152C

Conductive Metallized Nylon Non-woven Fabric (**Boston**)

- Purpose: Conductive fabric for general use, RF shielding, ESD, and antimicrobial
- Description: Silver plated Nylon non-woven fabric Cerex®, 1oz/sq.yd.
- Surface Resistance: < 0.5 Ohms/□
- Shielding Effectiveness: Average 60db from 30Mhz to 1Ghz
- Weight: 45g/sq.M
- Temperature Range: -30°C to 90°C
- Total Thickness: 0.15mm nominal
- Number of Splices: 1/98M nominal
- Roll Widths: 100cm nominal
- Master Roll Lengths: 100M nominal



Cerex®




Accreditations:
RoHS: Compliant
Reach: Compliant
Acc. ISO 9001:2000

Boston Silver-plated CEREX material
Mil-Std-285 modified

PRODUCT APPLICATIONS

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding
- ⇒ Medical clothes
- ⇒ Wound dressing
- ⇒ RF Wall Paper

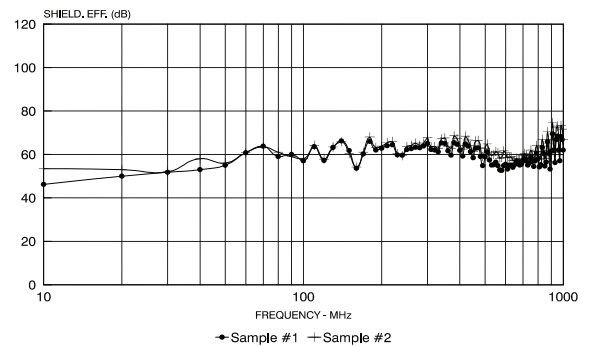

A Woman's Owned Small Business

VTT/Shieldex Trading USA
4502 Rt-31 Palmyra, NY, 14522

Phone: 315-597-1674
Fax: 315-597-6687
Email: whoge@rochester.rr.com
Www.shieldextrading.net

Statex Productions & Vertriebs GmbH
Kleiner Ort 11 28357 Bremen Germany
Tel: +49 421 275047/8, Fax: +49 421 273643
info@statex.de


© 2010 VTT
Rev 1.20.10