




Technical Data Sheet

Conductive *Nanking* Fabric Tape Ultra-Flex™

- **Purpose:** Conductive Fabric Tape for General Use
- **Description:** Nickel-Silver Woven Fabric with Adhesive
- **Surface Resistance:** Maximum 0.3 Ω/\square
- **Shielding Effectiveness:** Average 70db from 30Mhz to 1Ghz
- **Abrasion Resistance:** 500,000 Cycles
- **Temperature Range:** -30°C to 100°C
- **Total Thickness:** 0.127 mm to 0.150 mm (0.005 to 0.006") nominal
- **Weight:** 52g/sq.M
- **Roll Slit Widths:** Cut to size as customer requested
- **Roll Lengths:** 18yds



Nanking Conductive Fabric Tape
Mil-Std 285 Modified

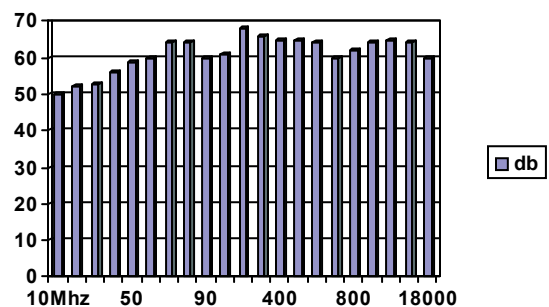

A Woman's Owned Small Business

VTT/Shieldex Trading USA
4502 Rt-31 Palmyra, NY, 14522

Phone: 315-597-1674
Fax: 315-597-6687
Email: whoge@rochester.rr.com
www.shieldextrading.net

Statex Productions & Vertriebs GmbH
Kleiner Ort 11 28357 Bremen Germany
Tel: +49 421 275047/8, Fax: +49 421 273643
info@statex.de


© 2009 VTT
Rev 2.20.09