


Conductive Fabric Tape Ultra-Flex™

- **Purpose:** Conductive Fabric Tape for General Use
- **Description:** Tin-Copper Plated PBN-II® Non-Woven Fabric with Conductive Adhesive
- **Surface Resistance:** Maximum 0.09 Ohms - Average 0.05 Ohms
- **Shielding Effectiveness:** Average 80db from 30Mhz to 1Ghz
- **Abrasion Resistance:** 1,000,000 Cycles
- **Temperature Range:** -30°C to 100°C
- **Total Thickness:** 0.127 mm to 0.150 mm (0.005 to 0.006") nominal
- **Weight:** 0.07 to 0.09 Kg/ .84 M² (2.3 to 3.0 oz/square yard)
- **Roll Slit Widths:** Cut to size as customer requested
- **Roll Lengths:** 18yds



UltraFlex Conductive Fabric Tape
Mil-Std 285 Modified

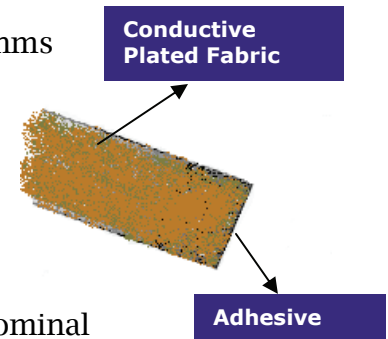