




# Technical Data Sheet

## UltraFlex™ Conductive Fabric Tape With Mask


- **Purpose:** Conductive Fabric Tape for Use in Finishing Operations
- **Description:** Tin-Copper Plated PBN-II® Non-Woven Fabric, Pressure Sensitive Adhesive and Heat-Release Mask

Adhesive and Heat-Release Mask

- **Surface Resistance:** Maximum 0.09 Ohms - Average 0.05 Ohms
- **Shielding Effectiveness:** Average 80db from 30Mhz to 1Ghz
- **Abrasion Resistance:** 1,000,000 Cycles
- **Temperature Range:** -30°C to 100°C
- **Total Thickness:** 0.127 mm to 0.150 mm (0.005 to 0.006") nominal
- **Weight:** 0.07 to 0.09 Kg/ .84 M<sup>2</sup> (2.3 to 3.0 oz/square yard)

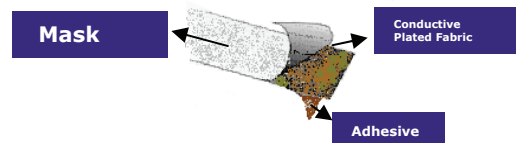

UltraFlex Conductive Fabric Tape  
Mil-Std 285 Modified

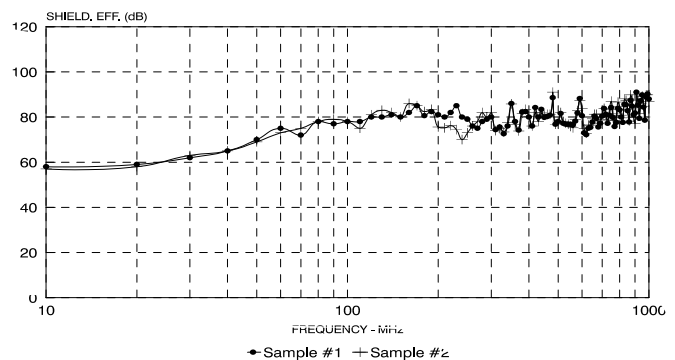

*A Woman's Owned Small Business*

**VTT/Shieldex Trading USA**  
4502 Rt-31 Palmyra, NY, 14522

**Phone: 315-597-1674**  
**Fax: 315-597-6687**  
**Email: whoge@rochester.rr.com**  
**Www.shieldextrading.net**

Statex Productions & Vertriebs GmbH  
Kleiner Ort 11 28357 Bremen Germany  
Tel: +49 421 275047/8, Fax: +49 421 273643  
info@statex.de

