




PN# 110010180RS



## Shieldex® Bremen-RS


- Purpose: Conductive fabric for general use
- Description: Silver (Ag) plated Nylon fabric. Extreme high flexibility.
- Raw material: Nylon ripstop fabric
- Surface Resistivity: < 0.3 Ohms / □
- RF Shielding Effectiveness: Average 60 dB from 30Mhz to 10Ghz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.003" (0.090mm) ± 12%
- Number of Splices: 1/98 Lm nominal
- Weight: 43 g/m<sup>2</sup> ± 10%
- Roll Widths: 52" (134cm) ± 1"

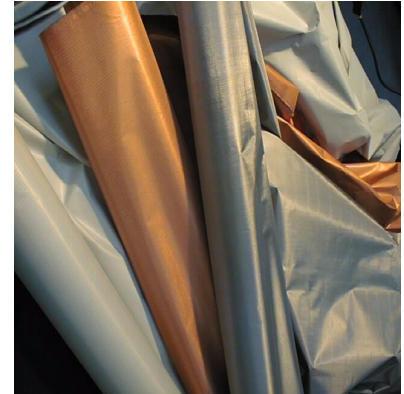

### PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding
- ⇒ Medical clothes
- ⇒ Wound dressing
- ⇒ RF shielded enclosure

Shielding Effectiveness IEEE 299

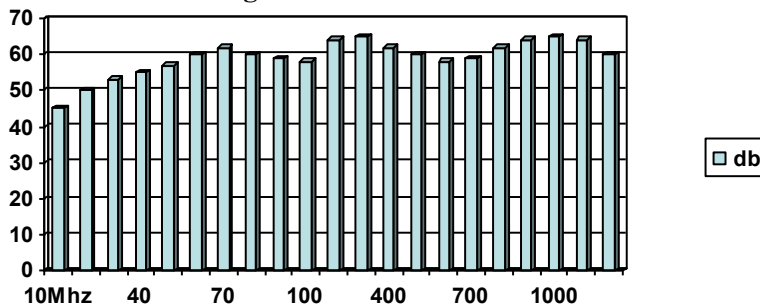

□ db

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Öeko-Tex® Standard 100  
 Acc. ISO 9001:2000

V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522  
 Phone: 315-597-1674  
 Fax: 315-597-6687  
 Web: www.vtechtextiles.com  
 Email: whoge@rochester.twcbc.com



Statex Productions & Vertriebs GmbH  
 Kleiner Ort 11 28357  
 Bremen Germany  
 Tel: +49 421 275047/8,  
 Fax: +49 421 273643  
 info@statex.de