



PN# 1150902130TB




Shieldex® Technik-tex P130+B

- Purpose: High conductive fabric for general use
- Description: Silver (Ag) plated knitted fabric
- Raw Material: 78% Nylon + 22% Elastomer
- Plating: 99% pure silver
- Coating (+B): Polyurethane as additional protective coating
- Stretch: DS (double stretch direction –warp—weft)
- Surface Resistivity: < 2 Ohms / □ (front / visible side)
- Temperature Range: -30°C to 90°C / -22°F to 194°F
- Total Thickness: 0.021" (0.55mm) ± 10%
- Abrasion Resistance: 10,000 cycles
- Weight: 141 g/m² ± 10%
- Roll Widths: 52" (132cm) ± 2"
- Master Roll Lengths: Average 30 Lm / 33 Lyd



PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for technical application
- ⇒ EMI shielding, reflection, sensors (Example: vital signs, stimulation of nerves and muscles)

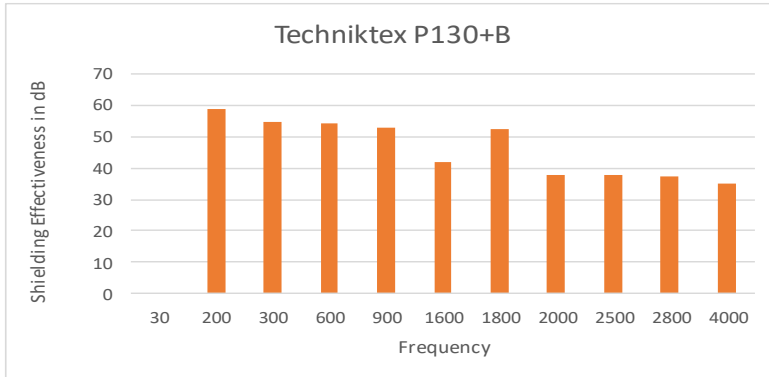

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2000
 Oeko-Tex Standard 100



V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522
 Phone: 315-597-1674
 Fax: 315-597-6687
 Web: www.vtechtextiles.com
 Email: whoge@rochester.twcbc.com

Technical Textiles Inc.

A Woman's Owned Small Business



Statex Productions & Vertriebs GmbH
 Kleiner Ort 11 28357
 Bremen Germany
 Tel: +49 421 275047/8,
 Fax: +49 421 273643
 info@statex.de