



Technical Textiles Inc.

14002101130LXKR



Conductive Nora LX Fabric Tape Ultra Flex™


- Purpose: Conductive fabric tape for general use
- Description: Nickel, Copper (Ni/Cu) woven fabric with adhesive
- Surface Resistivity: < 0.5 Ohms / □
- RF Shielding Effectiveness: Average 80 dB from 30Mhz to 10Ghz
- Abrasion Resistance: 500,000 Cycles
- Temperature Range: -30°C to 90°C / -22°F to 194°F
- Total Thickness: 0.127mm to 0.150mm (0.005—0.006")
- Weight: 92 g/m² ± 10%
- Roll Slit Widths:
 - 14002101130LXKR13 = 1/2" (13mm)
 - 14002101130LXKR26 = 1" (26mm)
 - 14002101130LXKR50 = 2" (50mm)
 - 14002101130LXKR75 = 3" (75mm)



PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding

Shielding Effectiveness IEEE 299

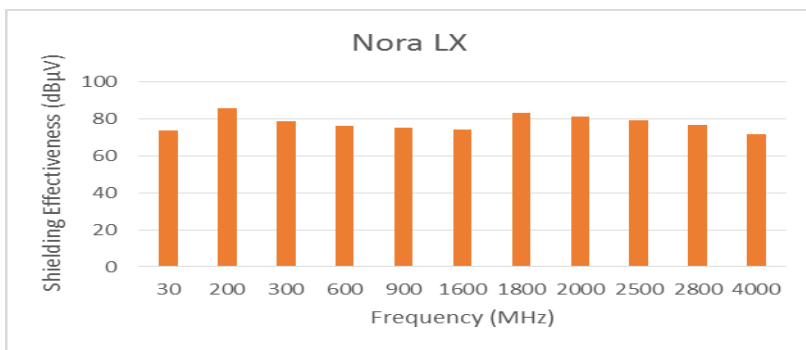

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2000



Technical Textiles Inc.

A Woman's Owned Small Business

V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522
 Phone: 315-597-1674
 Fax: 315-597-6687
 Web: www.vtechtextiles.com
 Email: whoge@rochester.twcbc.com

