





Shieldex® Nora Dell-CR

- **Purpose:** Very high conductivity in a metalized nylon fabric and Clean Room Compatible. Highly resistant to galvanic corrosion. Provides extreme durability.
- **Description:** Nickel/Copper/Silver (Ni/Cu/Ag) plated Nylon fabric.
- **Raw material:** Nylon ripstop fabric
- **Surface Resistivity:** < 0.009 Ω / □
- **RF Shielding Effectiveness:** Average 95 dB from 30MHz to 10GHz
- **Abrasion Resistance:** 1,000,000 Cycles
- **Temperature Range:** -40°C to 100°C / -40°F to 212°F
- **Total Thickness:** 0.003" (0.127mm) ± 12%
- **Number of Splices:** 1/98 Lm nominal
- **Weight:** 112g/m² ± 15%
- **Roll Widths:** 52"± 1" (132cm)
- **Master Roll Lengths:** Average 200 Lm / 218 Lyd

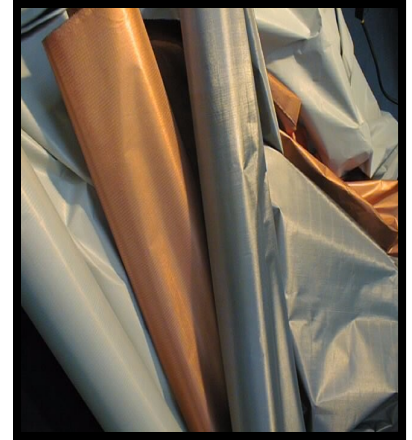

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding fabric for RF tents and pouches for clean room applications
- ⇒ EMI/RFI cable shielding
- ⇒ Shielding material for laminated flat I/O shielding panels

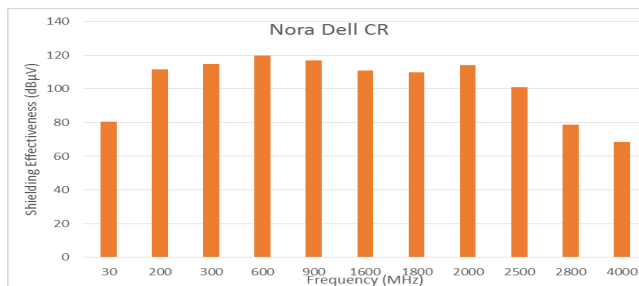

Accreditations:
RoHS: Compliant
Reach: Compliant
Acc. ISO 9001:2015

Physical Address
 V Technical Textiles, Inc
 320 South Main Street
 Newark, NY 14513
 Phone: (315)-597-1674
 Fax: (315)-597-6687



Mailing Address
 V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522



www.vtechtextiles.com
 info@vtechtextiles.com



Statex Produktions -und Vertriebs GmbH
 Kleiner Ort 11 28357 Bremen Germany
 Tel: +49 421 27 50 47
 Fax: +49 421 27 36 43
 info@statex.de