




PN# 1400201130PW




## Shieldex® Nora-PW

- Purpose: Conductive woven fabric for general use.
- Description: Nickel, Copper, Silver (Ni/Cu/Ag) plated Nylon fabric.
- Raw material: Nylon plain weave fabric.
- Surface Resistivity: < 0.03 Ohms / □
- RF Shielding Effectiveness: Average 85 dB from 30MHz to 10GHz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.004" (0.102mm) ± 12%
- Number of Splices: 1/100Lm nominal
- Weight: 83 g/m<sup>2</sup> ± 10%
- Roll Widths: 52" ± 1.5" (132cm)
- Master Roll Lengths: Average 200 Lm / 218Lyd

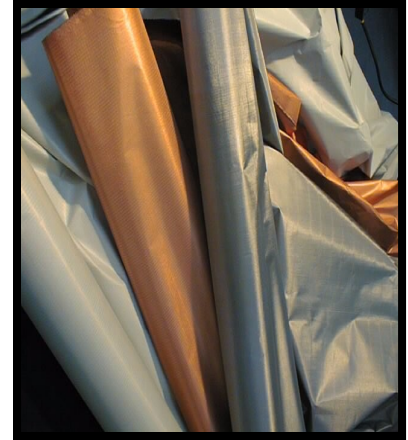

### PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding material for laminated flat I/O shielding panels
- ⇒ EMI/RFI cable shielding

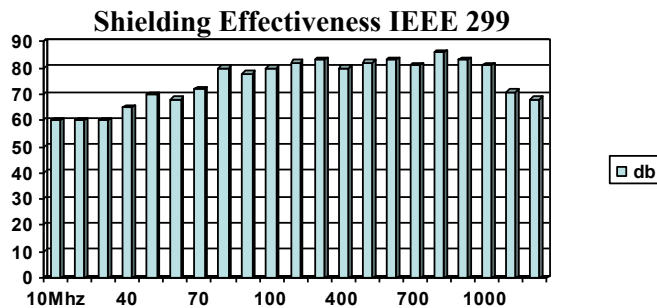

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Acc. ISO 9001:2015

Physical Address  
 V Technical Textiles, Inc  
 320 South Main Street  
 Newark, NY 14513  
 Phone: (315)-597-1674



Mailing Address  
 V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522



www.vtechtextiles.com  
 info@vtechtextiles.com



Statex Produktions -und Vertriebs GmbH  
 Kleiner Ort 11 28357 Bremen Germany  
 Tel: +49 421 27 50 47  
 Fax: +49 421 27 36 43  
 info@statex.de