




150030130KR




**Shieldex® Zeven + 30 Conductive Fabric Tape Ultra Flex™**

- Purpose: Conductive fabric tape for general use.
- Description: 2 metalized layers with conductive protective C2 (Black) coating. Silver (C2/Ag) woven fabric with adhesive.
- Surface Resistivity:  $< 0.3 \Omega / \square$
- RF Shielding Effectiveness: Average 60dB from 30MHz to 10GHz.
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range:  $-30^{\circ}\text{C}$  to  $90^{\circ}\text{C}$  /  $-22^{\circ}\text{F}$  to  $194^{\circ}\text{F}$
- Total Thickness: 0.005-0.006" (0.127mm to 0.150mm)
- Weight:  $52 \text{ g/m}^2 \pm 10\%$
- Roll Slit Widths:
  - 1200131127KR13 = 1/2" (13mm)
  - 1200131127KR26 = 1" (26mm)
  - 1200131127KR50 = 2" (50mm)
  - 1200131127KR75 = 3" (75mm)

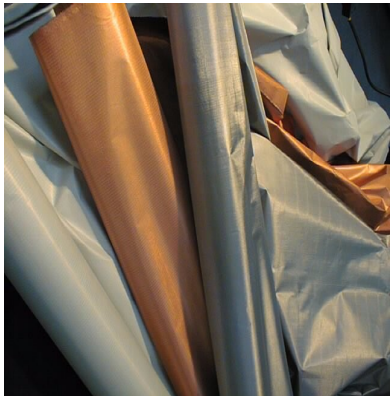

**PRODUCT APPLICATION EXAMPLES**

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding

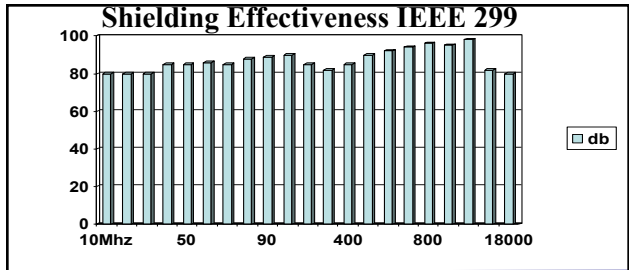

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Acc. ISO 9001:2015

**Physical Address**  
 V Technical Textiles, Inc  
 320 South Main Street  
 Newark, NY 14513  
 Phone: (315)-597-1674  
 Fax: (315)-597-6687



**Mailing Address**  
 V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522



www.vtechtextiles.com  
 info@vtechtextiles.com



**Statex Produktions -und Vertriebs GmbH**  
 Kleiner Ort 11 28357 Bremen Germany  
 Tel: +49 421 27 50 47  
 Fax: +49 421 27 36 43  
 info@statex.de

